




Features:

- M12*1 mm , Metal housing;
- 4mm , non-flush mountable;
- DC 3-wire , switching output;
- Withstand High-temperatures(-25...150°C);
- Cable & Connector versions


RoHS **CE**

Dimensioned drawing

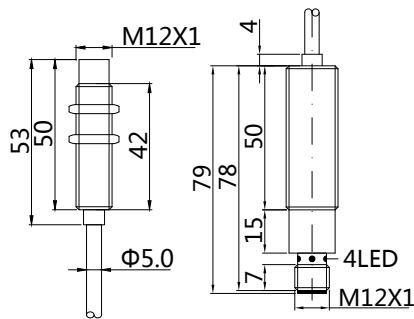

Mounting

(non-flush mounting)



Sn	D1	D2	D3
M1204	≥9	≥24	≥12

⚠ Tightening torque of the fastening screws: <10Nm!

Correction Factor	
Nav-ferrous metal	Factor
Fe360	1
Aluminum	0.35~0.45
Brass	0.35~0.5
Copper	0.25~0.45
Stainless steel	0.6~0.1
Cast Iron	0.93~1.05
Nickel	0.65~0.75

Model No.

Sensing range		Sn: 4 mm
NPN	SIHN-M12-04P-V11-K3-3M12-150EXT	
PNP	SIHN-M12-04N-V11-K3-3M12-150EXT	

Technical data

Electrical data	Operating voltage	10-30V DC
	Switching frequency	500Hz/150°C
	Voltage drop	≤1.8V
	Leakge current	<0.01mA
	Amplifier	External
	Load current	200mA
	No load current	≤25mA
	Hysteresis	3-15%(Sr)
	Repeatability	<3.0%(Sr)
	Temperature drift	<10%(Sr)
	Short circuit protection	Yes
	Overload protection	Yes
	Polarity reversal protection	Yes
Environment	Ambient temperature	-25...150°C
	Ingress protection	IP66
Mechanical data	Housing material	Stainless steel
	Face material	PEEK
Electrical connection	Connectors	KFF46PH cable/3m ; 3*0.26mm ² S12 connetor

Wiring

