


Features:

- Φ4 mm , Stainless steel housing;
- 0.8/1.2mm , flush mountable;
- DC 3-wire , switching output;
- Cable




Dimensioned drawing



Mounting

(flush mounting)



Sn	D1	D2	D3
H40.8	≥0	≥4	≥4
H41.2	≥0	≥4	≥4

Correction Factor	
Nav-ferrous metal	Factor
Fe360	1
Aluminum	0.35~0.45
Brass	0.35~0.5
Copper	0.25~0.45
Stainless steel	0.6~1.0
Cast Iron	0.93~1.05
Nickel	0.65~0.75


Model No.

Sensing range	Sn:0.8 mm	Sn:1.2 mm
NPN N. O	SIF-H4-0.8N-V11-PV2	SIF-H4-1.2N-V11-PV2
NPN N. C	SIF-H4-0.8N-V21-PV2	SIF-H4-1.2N-V21-PV2
PNP N. O	SIF-H4-0.8P-V11-PV2	SIF-H4-1.2P-V11-PV2
PNP N. C	SIF-H4-0.8P-V21-PV2	SIF-H4-1.2P-V21-PV2

Technical data

Electrical data	Operating voltage	10-30V DC
	Switching frequency	2000Hz
	Voltage drop	≤2.0V
	Leakge current	<0.01mA
	Load current	100mA
	No load current	≤10mA(24V)
	Hysteresis	<15%(Sr)
	Repeatability	<1.0%(Sr)
	Temperature drift	<10%(Sr)
	Short circuit protection	Yes
	Overload protection	Yes
	Polarity reversal protection	Yes
Environment	Ambient temperature	-25...70°C
	Ingress protection	IP67
Mechanical data	Housing material	Stainless steel
	Face material	POM
Electrical connection	Connectors	PVC cable/2m ; 3*0.15mm ²

Wiring

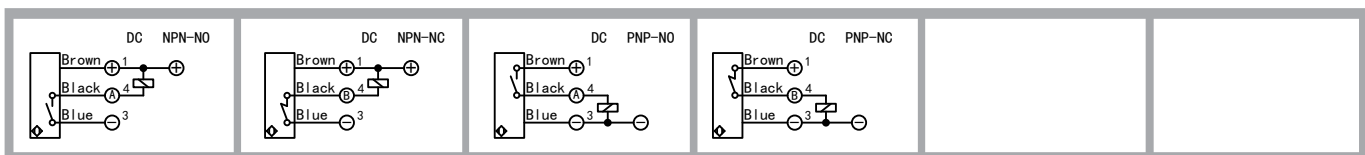

General Information

Inductive Sensors

Capacitive Sensors

Photoelectric Sensors

Ultrasonic Sensors

Solid state relay series

Connectors

Accessories

Index Of Types